
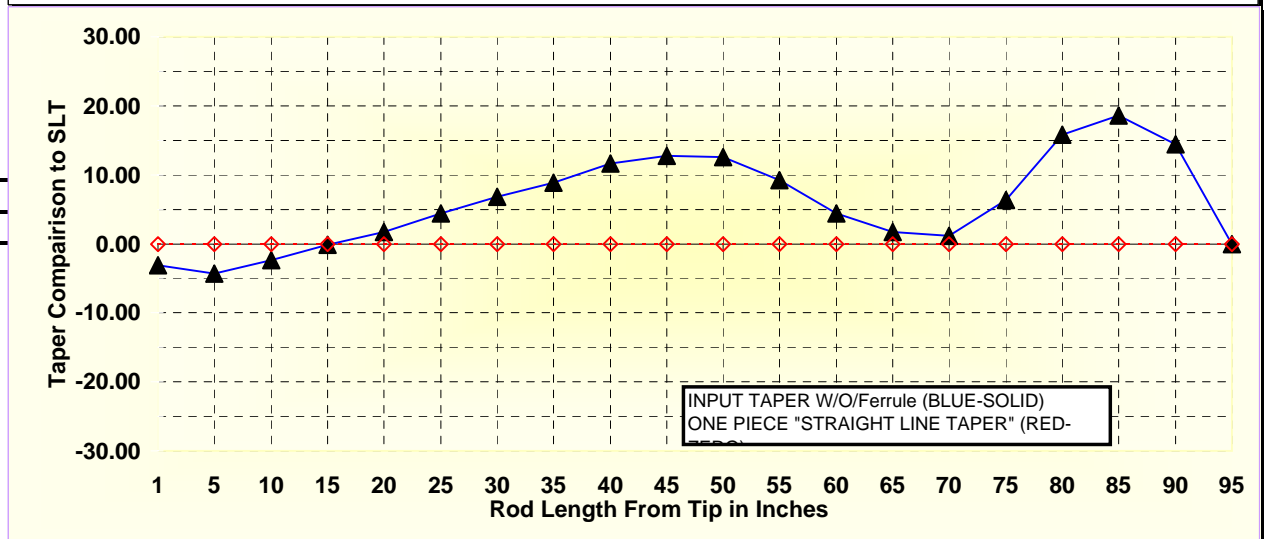


NR7652-17-MM

# STRAIGHT LINE TAPER ROD PROGRAM Ver. LL By Bob Norwood

Inch	Taper	Input Taper vs SLT	Stress	Half Taper
1	69.0	-3.1	56.0	34.5
5	81.3	-4.3	174.2	40.7
10	96.8	-2.3	210.8	48.4
15	112.5	-0.2	206.8	56.3
20	127.9	1.7	193.3	64.0
25	144.3	4.4	174.6	72.2
30	160.5	6.8	159.1	80.3
35	176.4	8.9	146.7	88.2
40	193.0	11.7	134.7	96.5
45	208.0	12.8	128.1	104.0
50	224.0	12.6	124.9	112.0
55	236.5	9.2	127.4	118.3
60	247.0	4.4	132.4	123.5
65	259.4	1.7	134.0	129.7
70	273.7	1.1	132.5	136.9
75	294.0	6.3	123.6	147.0
80	318.5	15.8	111.6	159.3
85	336.0	18.6	109.0	168.0
90	346.0	14.4	113.8	173.0
95	0.0	0.0	0.0	0.0

## A Type 7'6" 2 pc for 5/6 wt @ 50 wt

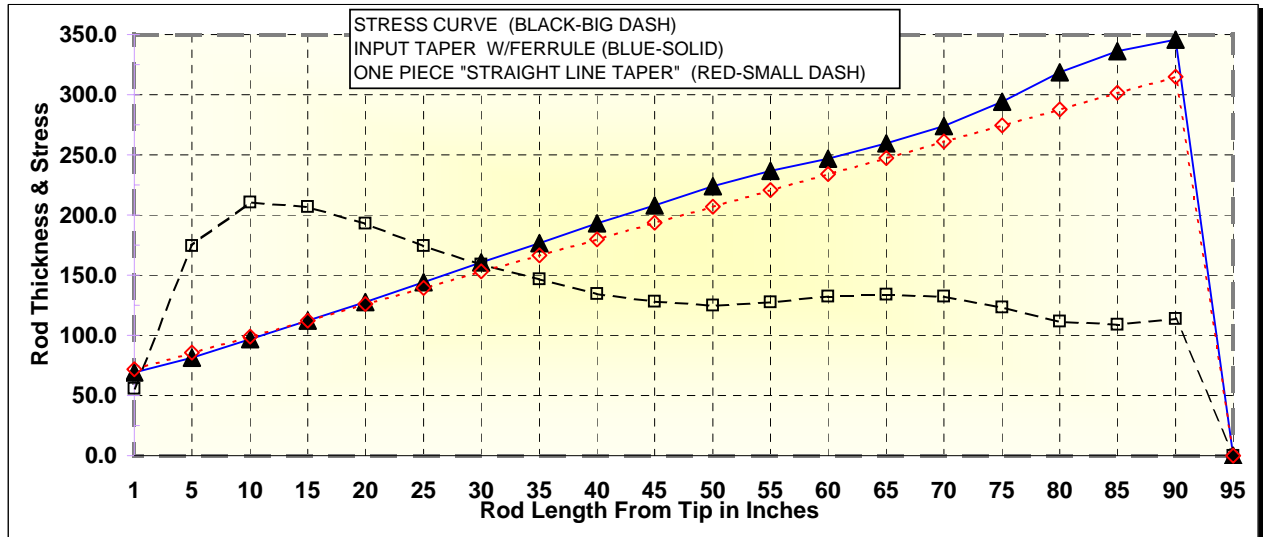

1st ferrule 45 2nd ferrule 0

Compensation for V & G	1
Compensation for Ferrule	1
Std Taper Increase	13.50
Tip Impact	2.21
Line Size	5
Weight-AFTMA	420
Line Fished (Ft)	50.0
1st Ferrule size	13
1st Ferrule Location	45.0
2nd Ferrule size	0
2nd Ferrule Location	0.0
Bamboo Wt	2.534

NOTES  
 Modified # 17 2/14/08 to smoother yet fast 5 DT or 6 WF.